


Agilent N8972A, N8973A, N8974A, N8975A NFA Series Noise Figure Analyzers

Data Sheet

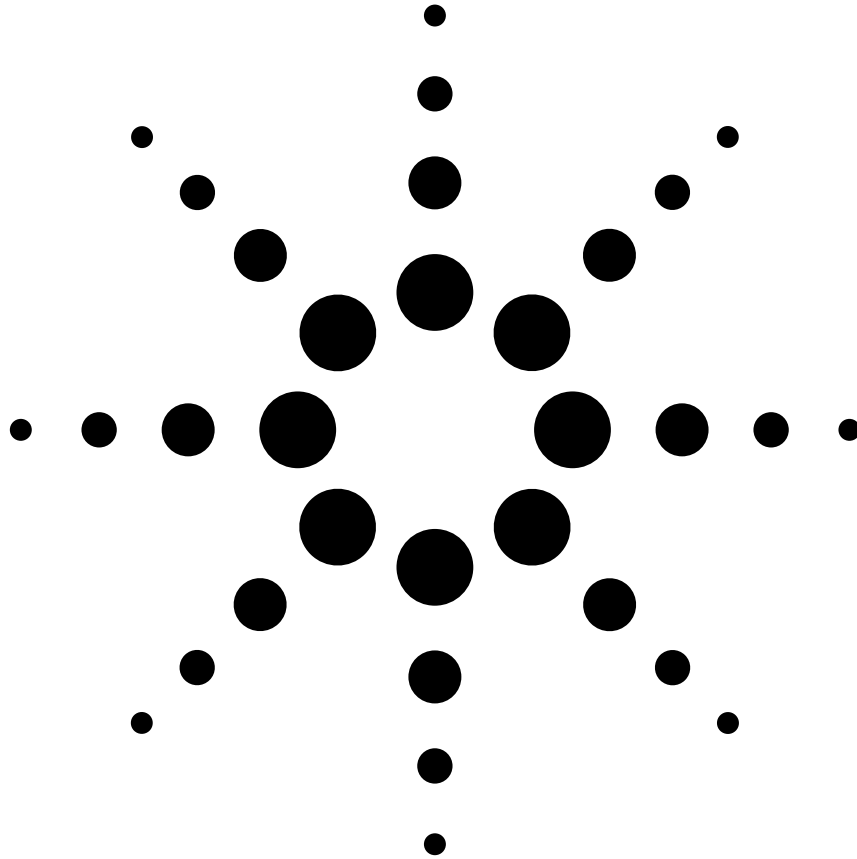

Agilent Technologies

Specifications

Specifications are only valid for the stated operating frequency, and apply over 0° C to +55° C unless otherwise noted. The analyzer will meet its specifications after 2 hours of storage within the operating temperature range, 60 minutes after the analyzer is turned on, with Alignment running. A user calibration is required before corrected measurements can be made.

Frequency

Frequency range¹

N8972A	10 MHz to 1.5 GHz
N8973A	10 MHz to 3.0 GHz
N8974A	10 MHz to 6.7 GHz
N8975A	10 MHz to 26.5 GHz

Measurement bandwidth (nominal)

N8972A	4 MHz
N8973A, N8974A, N8975A	4 MHz, 2 MHz, 1 MHz, 400 kHz, 200 kHz, 100 kHz

Frequency reference

	Standard²	Opt.1D5³
Aging	± < 2 ppm ⁴ /year	± < 0.1 ppm/year
Temperature stability	± < 6 ppm	± < 0.01 ppm
Settability	± < 0.5 ppm	± < 0.01 ppm

Tuning Accuracy⁵ (Start, Stop, Center, Marker)

4MHz measurement Bandwidth (default on all models of Noise Figure analyzer)

Frequency	Error
10MHz – 3.0 GHz	±< Reference error + 100 kHz
3.0GHz – 26.5 GHz	±< Reference error + 400 kHz

<4 MHz- Measurement Bandwidth (functionality not present in N8972A)

Frequency	Error
10MHz – 3.0 GHz	<± Reference error + 20 kHz
3.0GHz – 26.5 GHz	<± Reference error + 20% of measurement bandwidth

1. The N8974A and N8975A models have a mechanical switch fitted. This switch allows the analyzers to change between the 10 MHz to 3.0GHz and the 3.0 GHz to 6.7 GHz frequency range on the N8974A. On the N8975A, the switch allows the change between the 10 MHz to 3.0 GHz and the 3.0GHz to 26.5 GHz frequency range. If the current measurement frequency range crosses the 3.0GHz point, the switch will operate. The mechanical switch has a limited number of cycles over which it is reliable. To maximize the reliable life of the switch, switching over the 3.0GHz frequency point should be kept to a minimum.

2. Temperature stability on the standard frequency reference is achieved 60 minutes after the analyzer is turned on.

3. Option 1D5 recommended for applications requiring high frequency stability.

4. Parts Per Million (10⁻⁶).

5. Tuning accuracy is dependent on measurement bandwidth.

Noise figure and gain

Performance is dependent on the ENR¹ of the noise source used:

N8972A		Noise source ENR		
		4-7 dB	12-17 dB	20-22 dB
Noise figure	Measurement range	0 to 20 dB	0 to 30 dB	0 to 35 dB
	Instrument uncertainty	± < 0.1 dB	± < 0.1 dB	± < 0.15 dB
Gain²	Measurement range	-20 to +40 dB		
	Instrument uncertainty	± < 0.17 dB		

N8973A, N8974A and N8975A (10 MHz to 3.0 GHz)		Noise source ENR		
		4-7 dB	12-17 dB	20-22 dB
Noise figure	Measurement range	0 to 20 dB	0 to 30 dB	0 to 35 dB
	Instrument uncertainty	± < 0.05 dB	± < 0.05 dB	± < 0.1 dB
Gain²	Measurement range	-20 to +40 dB		
	Instrument uncertainty	± < 0.17 dB		

N8974A and N8975A (>3.0 GHz)		Noise source ENR		
		4-7 dB	12-17 dB	20-22 dB
Noise figure	Measurement range	0 to 20 dB	0 to 30 dB	0 to 35 dB
	Instrument uncertainty	± < 0.15 dB	± < 0.15 dB	± < 0.2 dB
Gain²	Measurement range	-20 to +40 dB		
	Instrument uncertainty	± < 0.17 dB		

Instrument's noise figure

	10 MHz to < 500 MHz	500 MHz to < 2.3 GHz	2.3 GHz to 3 GHz	> 3 GHz to 13.2 GHz	13.2 GHz to 26.5 GHz
Noise figure	< 4.9 dB + (0.0025 * freq in MHz)	< 7.4 dB + (0.00135 * freq in MHz)	< 4.4 dB + (0.0015 * freq in MHz)	< 12 dB	< 16 dB
Noise figure over a limited temperature range of 23° C ± 3° C	< 4.4 dB + (0.0025 * freq in MHz)	< 5.9 dB + (0.00135 * freq in MHz)	< 2.9 dB + (0.0015 * freq in MHz)	< 10.5 dB	< 12.5 dB

1. Excess Noise Ratio
2. For measurement bandwidths below 4 MHz, and spacing between measurement points below 3 MHz, gain uncertainty may increase to a maximum of ± 0.7 dB.

RF input

Connector


N8972A, N8973A N female, 50 Ω nominal

N8974A, N8975A APC 3.5 (m), 50 Ω nominal (ESD sensitive)

SWR (50 Ω reference)

	10 MHz to 500 MHz	500 MHz to 1 GHz	1 GHz to 1.5 GHz	1.5 GHz to 3 GHz	3 GHz to 6.7 GHz	6.7 GHz to 20 GHz	20 GHz to 26.5 GHz
SWR	< 1.6:1	< 1.8:1	< 1.9:1	< 1.8:1	< 1.3:1	< 2.1:1	< 2.4:1

Characteristic¹ SWR at 23° C \pm 3° C (10 MHz to 3.0 GHz)

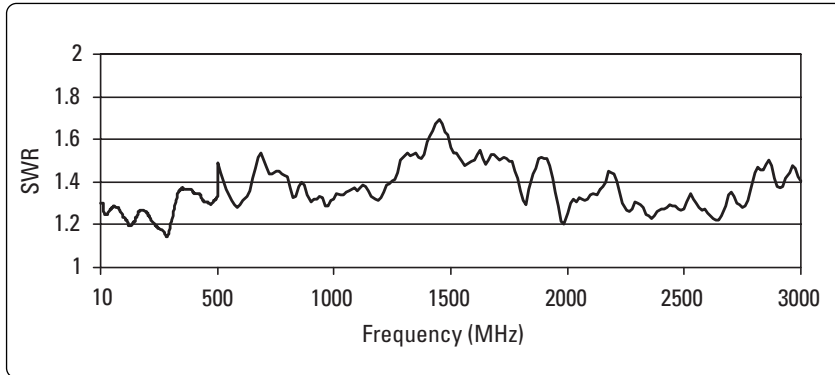

1. Characteristic values are met or bettered by 90% of instruments with 90% confidence.

Measurement

Sweep

Number of points	2 to 401, or fixed frequency
Setting	Start/Stop, Center/Span, Frequency list of up to 401 points
Sweep trigger	Continuous or Single

Measurement speed (nominal)

	8 averages	64 averages
N8972A (10 MHz to 1.5 GHz)	<100 ms/measurement	<80 ms/measurement
N8973A (10 MHz to 3.0 GHz)	<50 ms/measurement	<42 ms/measurement
	8 averages	64 averages
N8974A (10 MHz to 3.0 GHz)	< 50 ms/measurement	<42 ms/measurement
N8974A (3.0 GHz to 6.7 GHz)	< 70 ms/measurement	<50 ms/measurement
N8975A (10 MHz to 3.0 GHz)	< 50 ms/measurement	<42 ms/measurement
N8975A (3.0 GHz to 26.5 GHz)	< 70 ms/measurement	<50 ms/measurement

Modes

Amplifier	
Downconverter in DUT	With fixed or variable IF. Instrument capable of controlling an external LO via dedicated 'LO GPIB' connector
Upconverter in DUT	With fixed or variable IF. Instrument capable of controlling an external LO via dedicated 'LO GPIB' connector
System downconverter	Allows the use of an external downconverting mixer as part of the measurement system. Instrument capable of controlling an external LO via dedicated 'LO GPIB' connector
Loss compensation	Table of values vs. frequency for losses between noise source and DUT, and between DUT and analyzer
SNS Series noise source	ENR tables automatic upload. Continuous upload of T_{cold}

-
1. Corrected Noise Figure and Gain measured on a 3dB pad with a repetitive sweep of 101 points from 600 MHz to 1.0 GHz with a 4 MHz measurement bandwidth.
 2. Corrected Noise Figure and Gain measured on a 3dB pad with a repetitive sweep of 101 points from 4.0 GHz to 6 GHz with a 4 MHz measurement bandwidth.

Display

Type	17cm color LCD panel
Output format	Graphical, table of values, or meter mode
Display channels	2
Number of markers	4 per display channel
Limit lines	Upper and lower for each of 2 channels
Display units	
Noise figure	Noise figure (F dB), or as a ratio (F)
Gain	Gain (G dB), or as a ratio (G)
Y-factor	Y-factor (Y dB) or as a ratio (Y)
Effective noise temperature	Effective input noise temperature in Kelvin, °C, °F
P _{hot}	Relative power density in dB or as a ratio
P _{cold}	Relative power density in dB or as a ratio

Connectivity

GPIB	IEEE-488 bus connector
LO GPIB	IEEE-488 bus connector dedicated to local oscillator control (SCPI or custom command set)
Serial	RS-232, 9-pin D-Sub male
Printer	25-pin parallel D-Sub female, for connection with IEEE 1284 cable to a PCL3 or PCL5 compatible printer
VGA output	15-pin mini D-Sub female ¹
Probe power (nominal)	+15 Vdc, -12.6 Vdc at 150 mA max.
10 MHz Ref out	50 Ω nominal BNC (f), >0 dBm
10 MHz Ref in	50 Ω nominal BNC (f), -15 to +10 dBm
BNC Noise source drive output	
Connector type	50 Ω -type BNC (f)
Output voltage	On: 28.0 V \pm 0.1 V at up to 60mA peak Off: <1 V
SNS Noise source connector	For use with Agilent Technologies' SNS Series noise sources

1. 31.5 kHz horizontal, 60 Hz vertical sync rates, non-interlaced, analog RGB 640 x 480

General specifications

Data storage (nominal)	
Internal drive	30 traces, states or ENR tables
Floppy disk	30 traces, states or ENR tables
Power requirements	
On (line 1)	90 to 132 V rms, 47 to 440 Hz 195 to 250 V rms, 47 to 66 Hz Power consumption < 300 W
Standby (line 0)	< 5 W
Dimensions	
Without handle	222mm(H) x 410mm(D) x 375mm(W)
With handle (max)	222mm(H) x 515mm(D) x 409mm(W)
Weight (typical, without options)	
N8972A	15.3 kg (33.7 lbs.)
N8973A	15.5 kg (34.2 lbs.)
N8974A	17.5 kg (38.61 lbs.)
N8975A	17.5 kg (38.61 lbs.)
Audible noise	
< 42 dBa pressure and < 5.0 bels power (ISODP7779)	
Temperature range	
Operating	0° C to +55° C
Storage	-40° C to +70° C
Humidity range	
Operating	Up to 95% relative humidity to 40° C (non-condensing)
Altitude range	
Operating	to 4,600 meters
Calibration interval	
1-year minimum recommended	